

PARAMETERS

Model No.	UR2 (Indoor)	UR3 (Indoor)	UR3 (Outdoor)
Pixel Pitch	2.60mm	3.91mm	3.91mm
LED Type	SMD1515(Black LEDs)	SMD2020(Black LEDs)	SMD1921(Black LEDs)
Pixel Density	147456pixel/m²	65536pixel/m²	65536pixel/m²
Brightness	800-1200nits	800-1200nits	3500 ~ 4500nits
Color Temperature	6500 ~ 9500K	6500 ~ 9500K	6500 ~ 9500K
Scan Rate	1/16	1/16	1/16
Panel Dimension	Big Panel : 500mm*1000mm*85.5mm Small Panel : 500mm*500mm*85.5mm		
Panel Resolution	192*384pixel 192*192pixel	128*256pixel 128*128pixel	
Panel Weight	Big Panel : 10.5kg±10%	Small Panel: 5.5kg±10%	Big Panel :12kg±10% Small Panel: 6kg±10%
Panel Material	Die-casting Cabinet		
Max. Power Consumption	≤720w/m²		
Ave. Power Consumption	≤360w/m²		
Viewing Angle	H:160° V:140°		
Refresh Rate	3840Hz/7680Hz		
Gray Scale	14-16bit		
Working Voltage	AC100-240V~ 50/60Hz or AC200-240V~ 50/60Hz (two choose one)		
IP Rating	IP30		Front IP65 Rear IP54
Max. Stacking/Hanging	10m (Without wind-bracing frame) /20m (With wind-bracing frame)		
Curve	-10°~+10°		
Operating Temp/Humidity	-20℃ ~ +45℃; 10% ~ 60%RH		-20℃ ~ +45℃; 10% ~ 90%RH
Storage Temp/Humidity	-40℃ ~ +60℃; 10% ~ 60%RH		


*All product information is provided for reference only and is subject to upgrade or change without prior notice. *The final interpretation right of products is reserved by Gloshine.

SHENZHEN GLOSHINE TECHNOLOGY CO., LTD.

Tel: (86)0755-29951691
Fax: (86)0755-84419301
E-mail: international@gloshine.cn
Add: No. 20 Dingshanhe Road, Pingdi Town,
Longgang District, Shenzhen, China




GLOSHINE

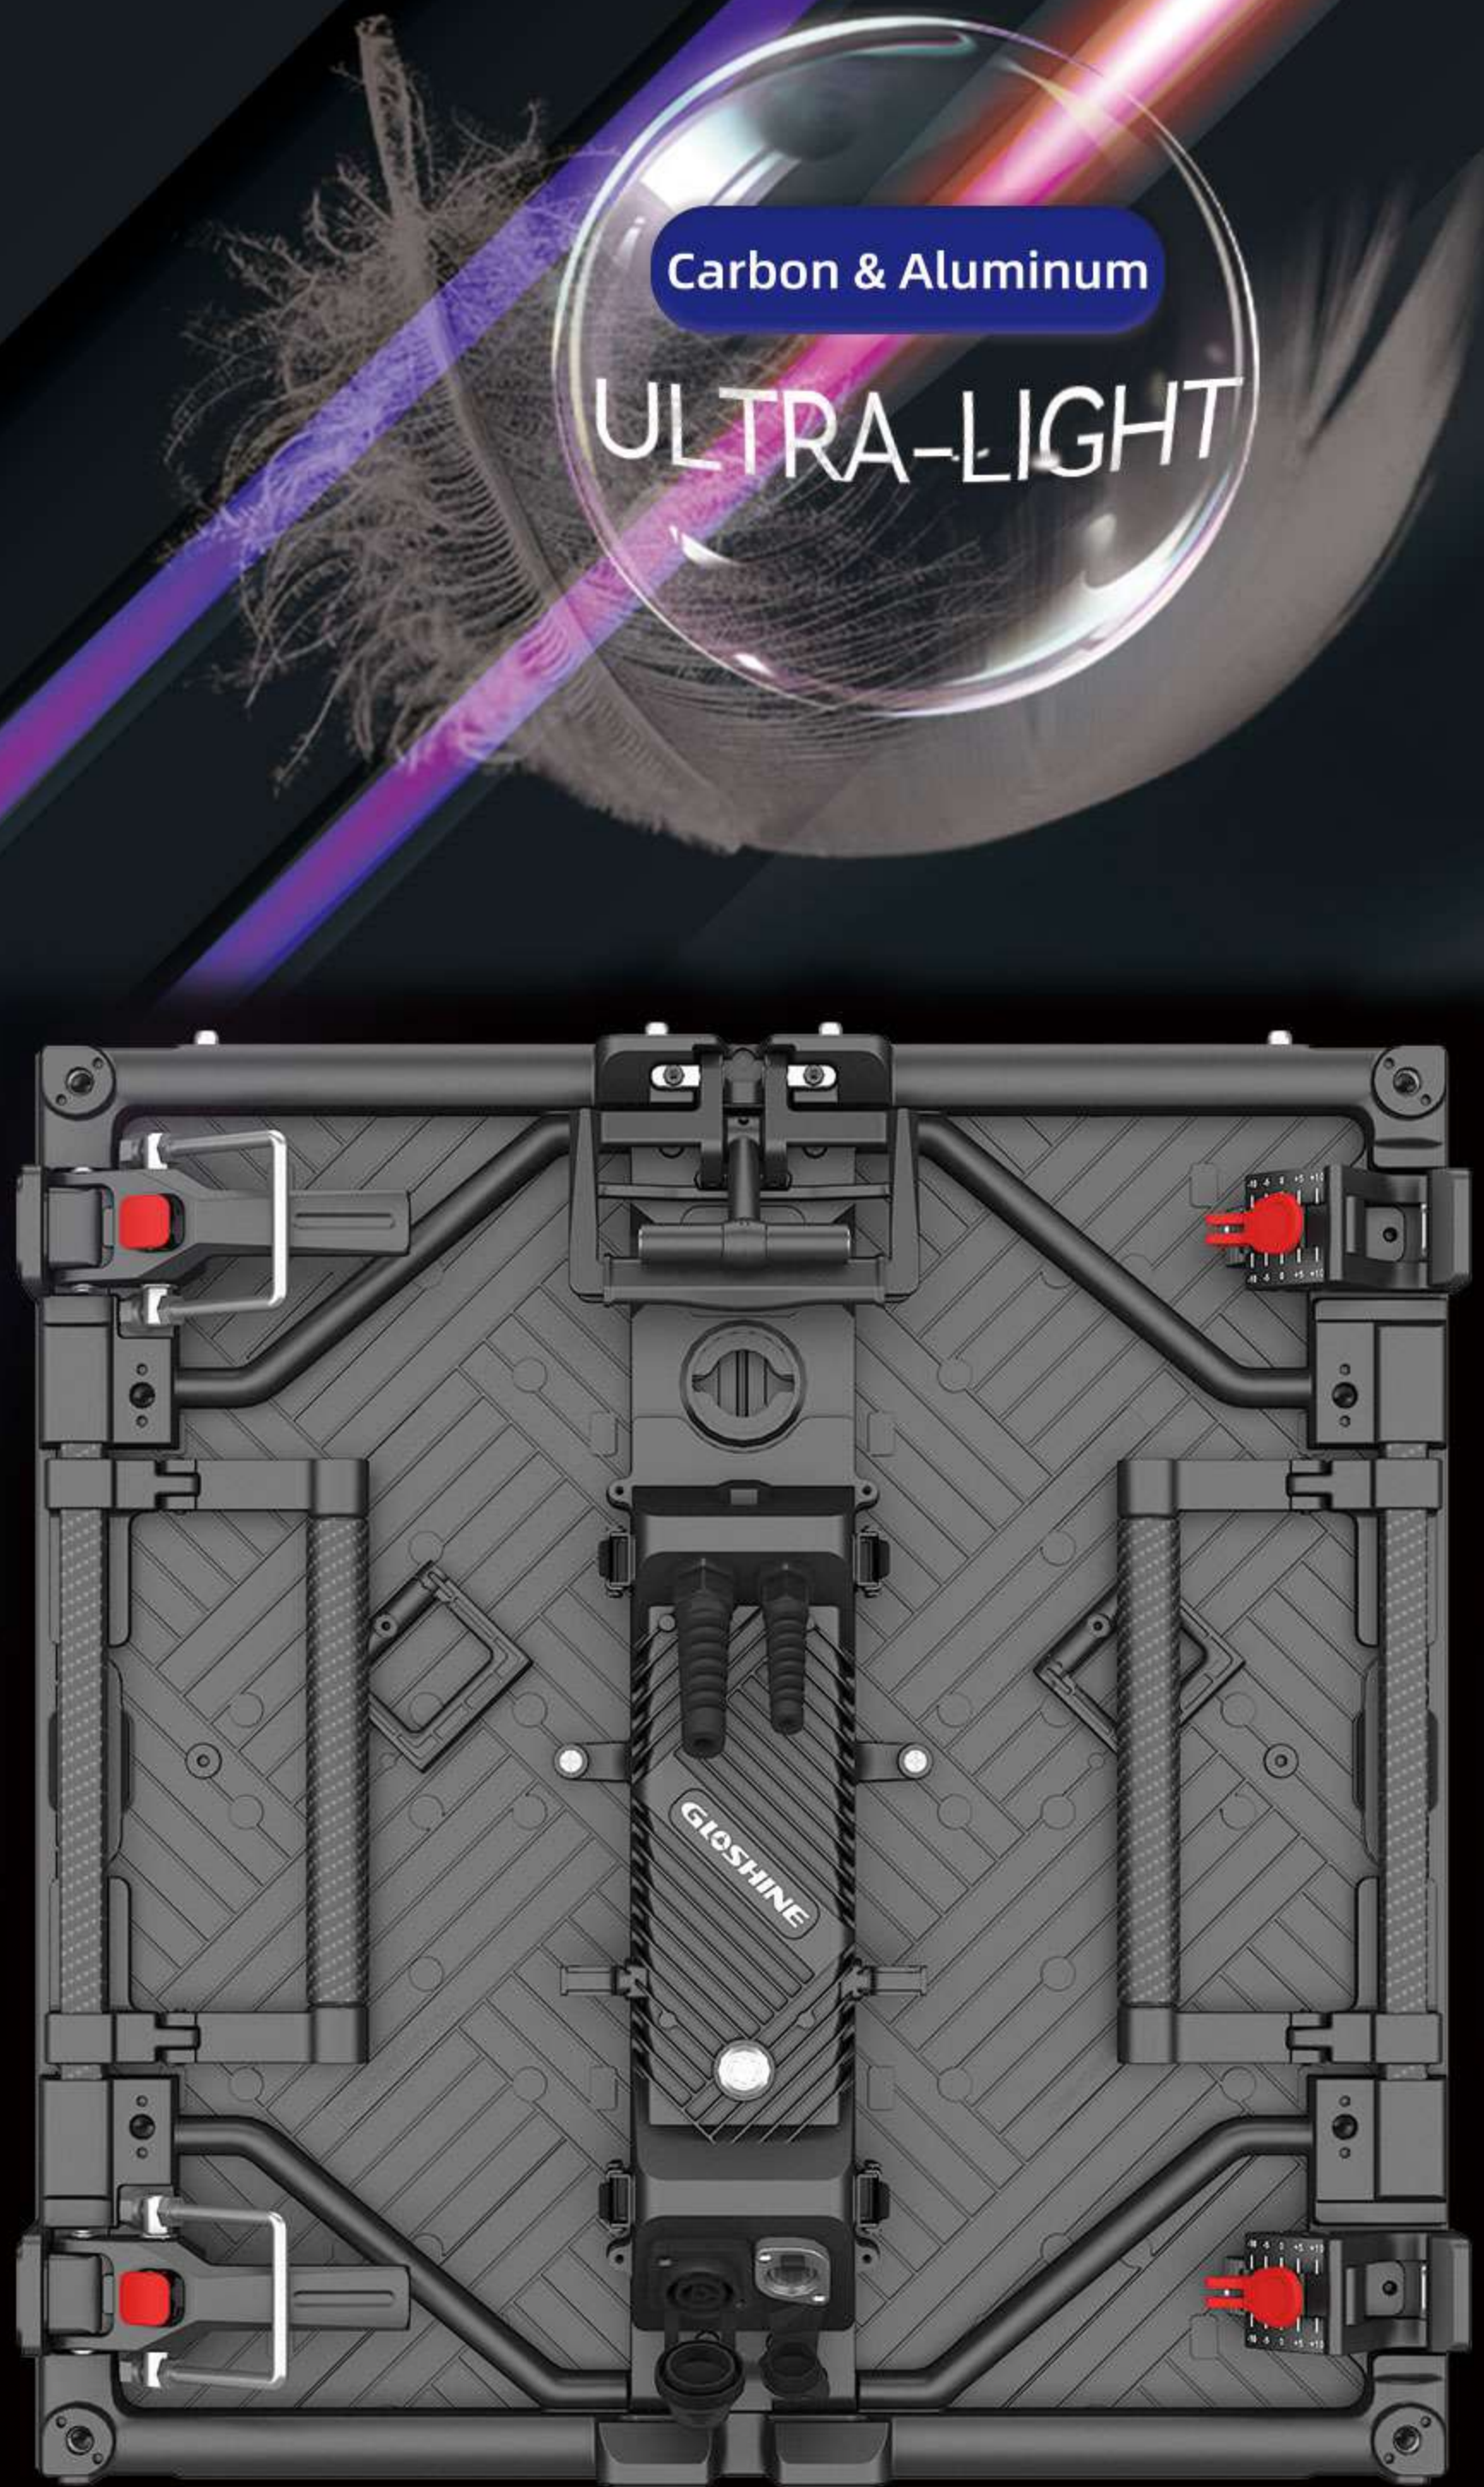

U R I G H T


W 5 0 0 m m × H 5 0 0 m m
W 5 0 0 m m × H 1 0 0 0 m m INDOOR&OUTDOOR

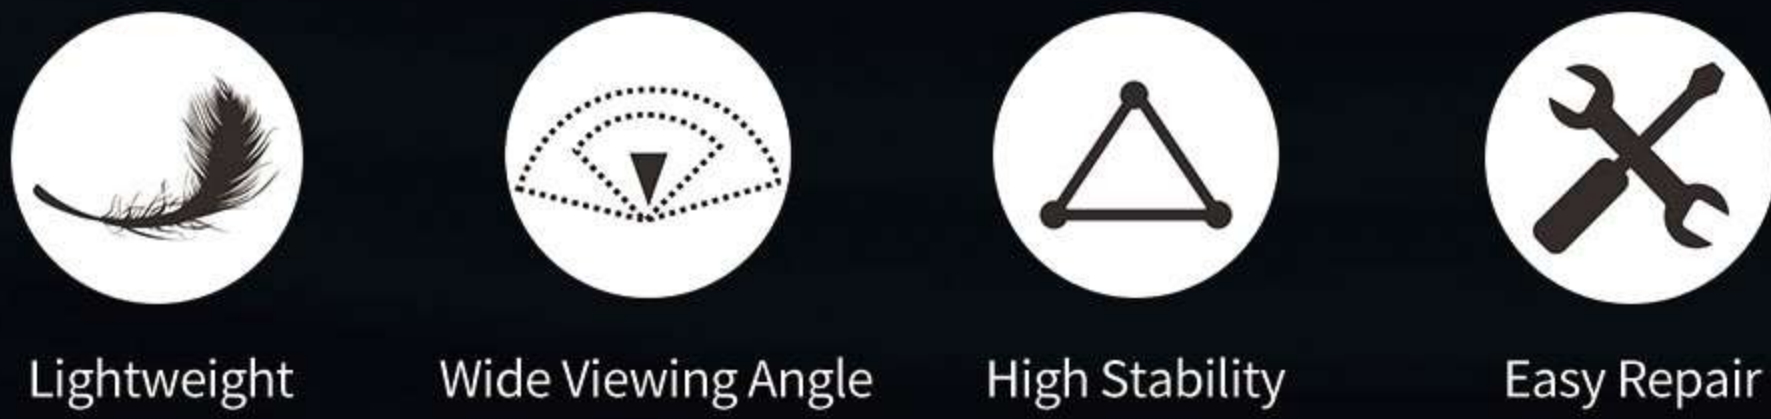

SHINING
YOURS

MULTIPLE INSTALLATION WAYS

- UR and UR mini support mix set-up.

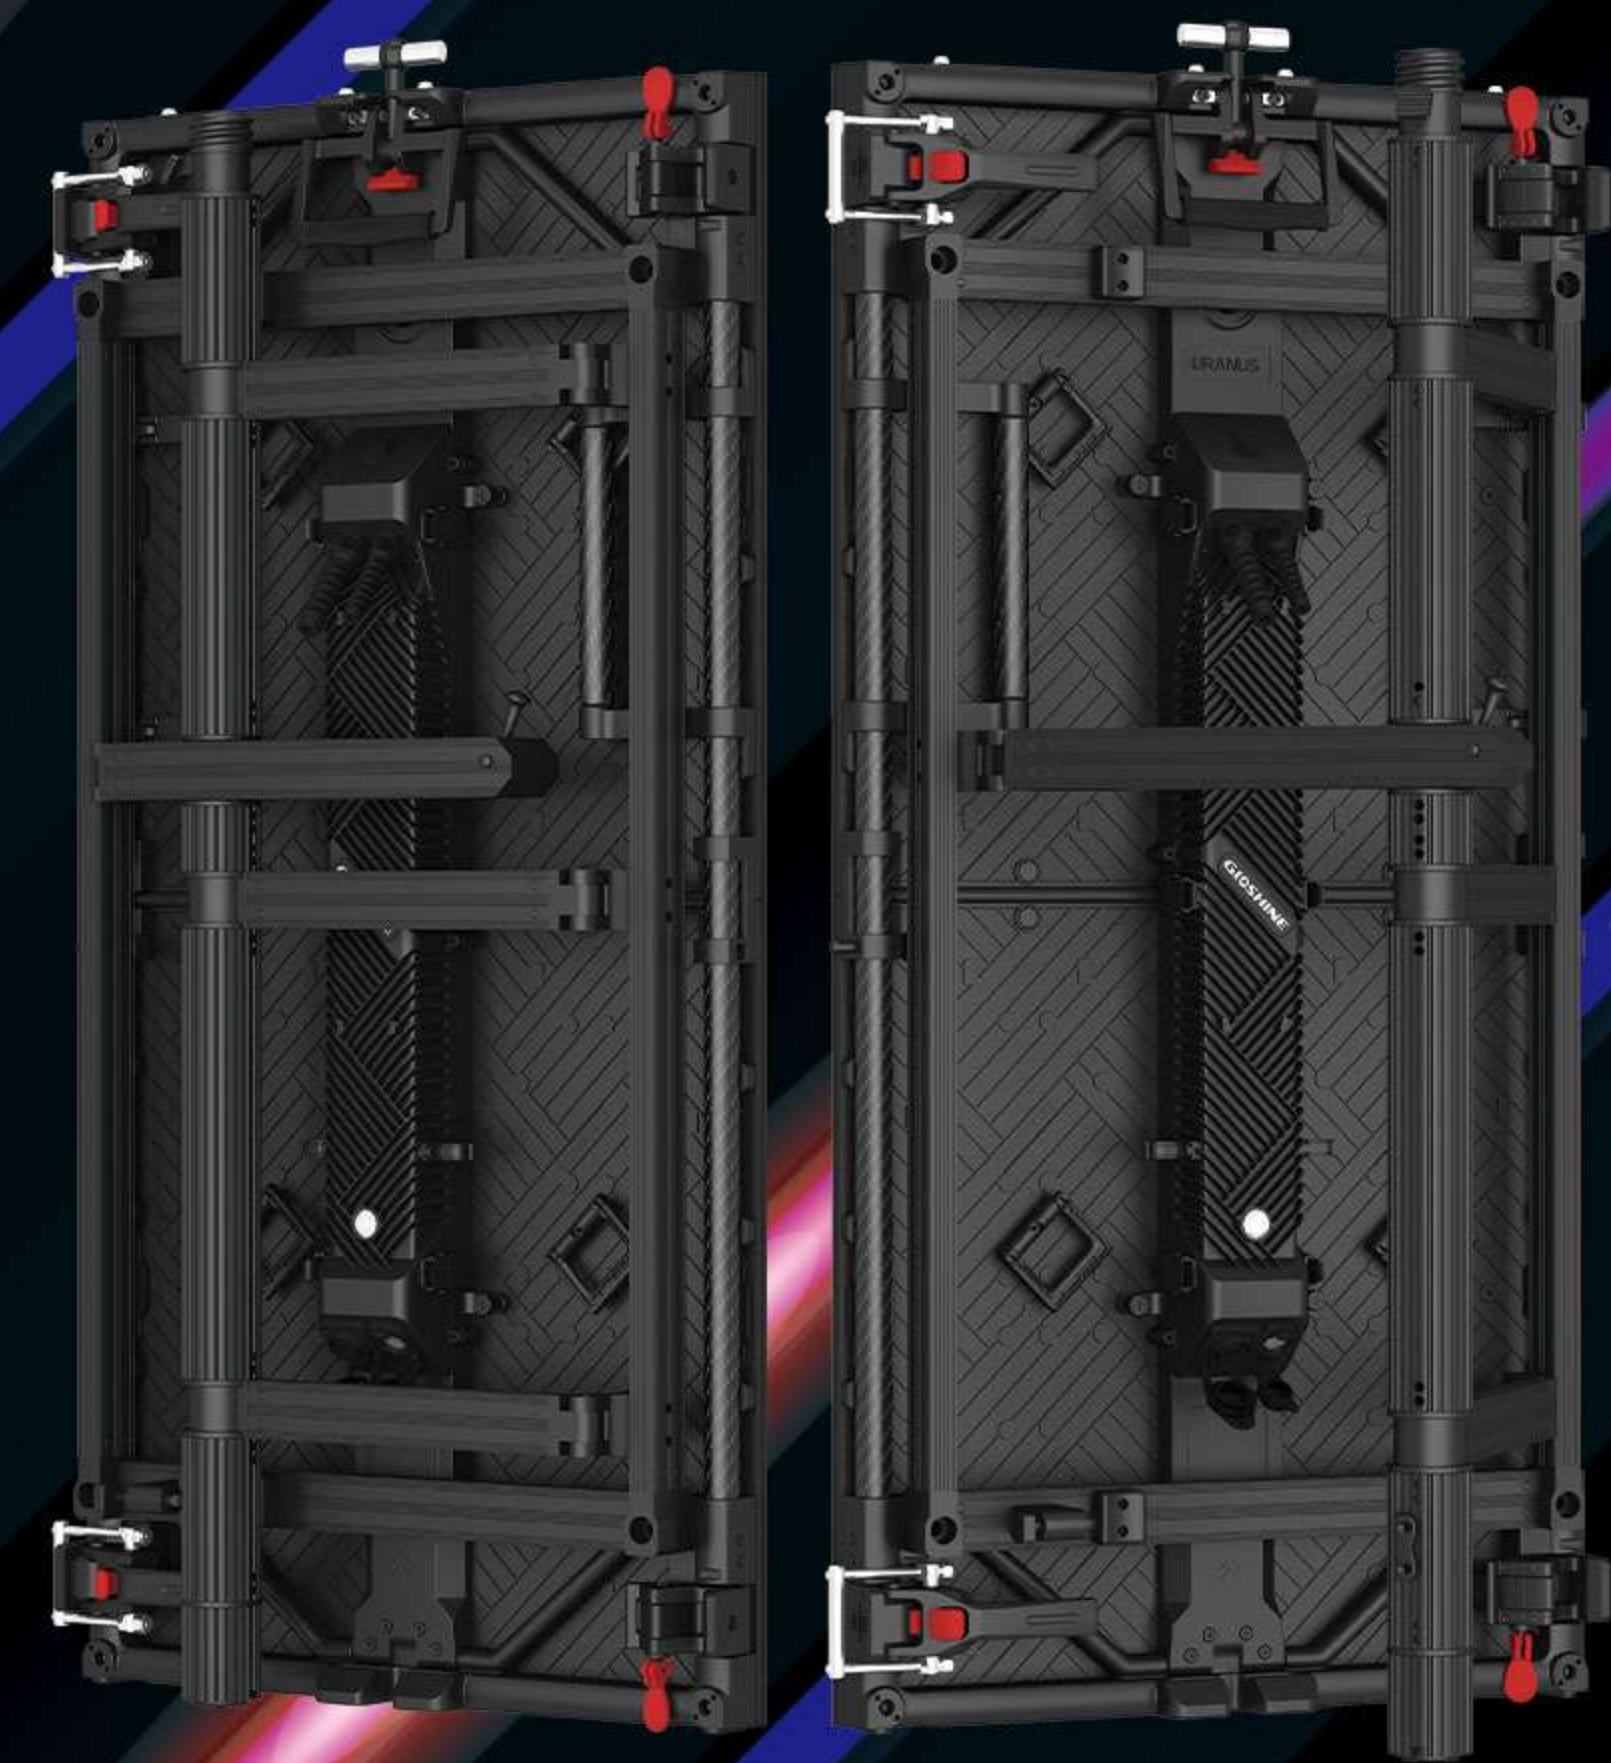


INTEGRATED WIND-BRACING SYSTEM

- With wind-bracing frame, the stacking&hanging installation is more convenient. The whole screen structure is more strong for wind resistance, and the hanging height can up to 20m.



CURVED LOCK

- Supports curved splicing, covering from -10°to +10°.

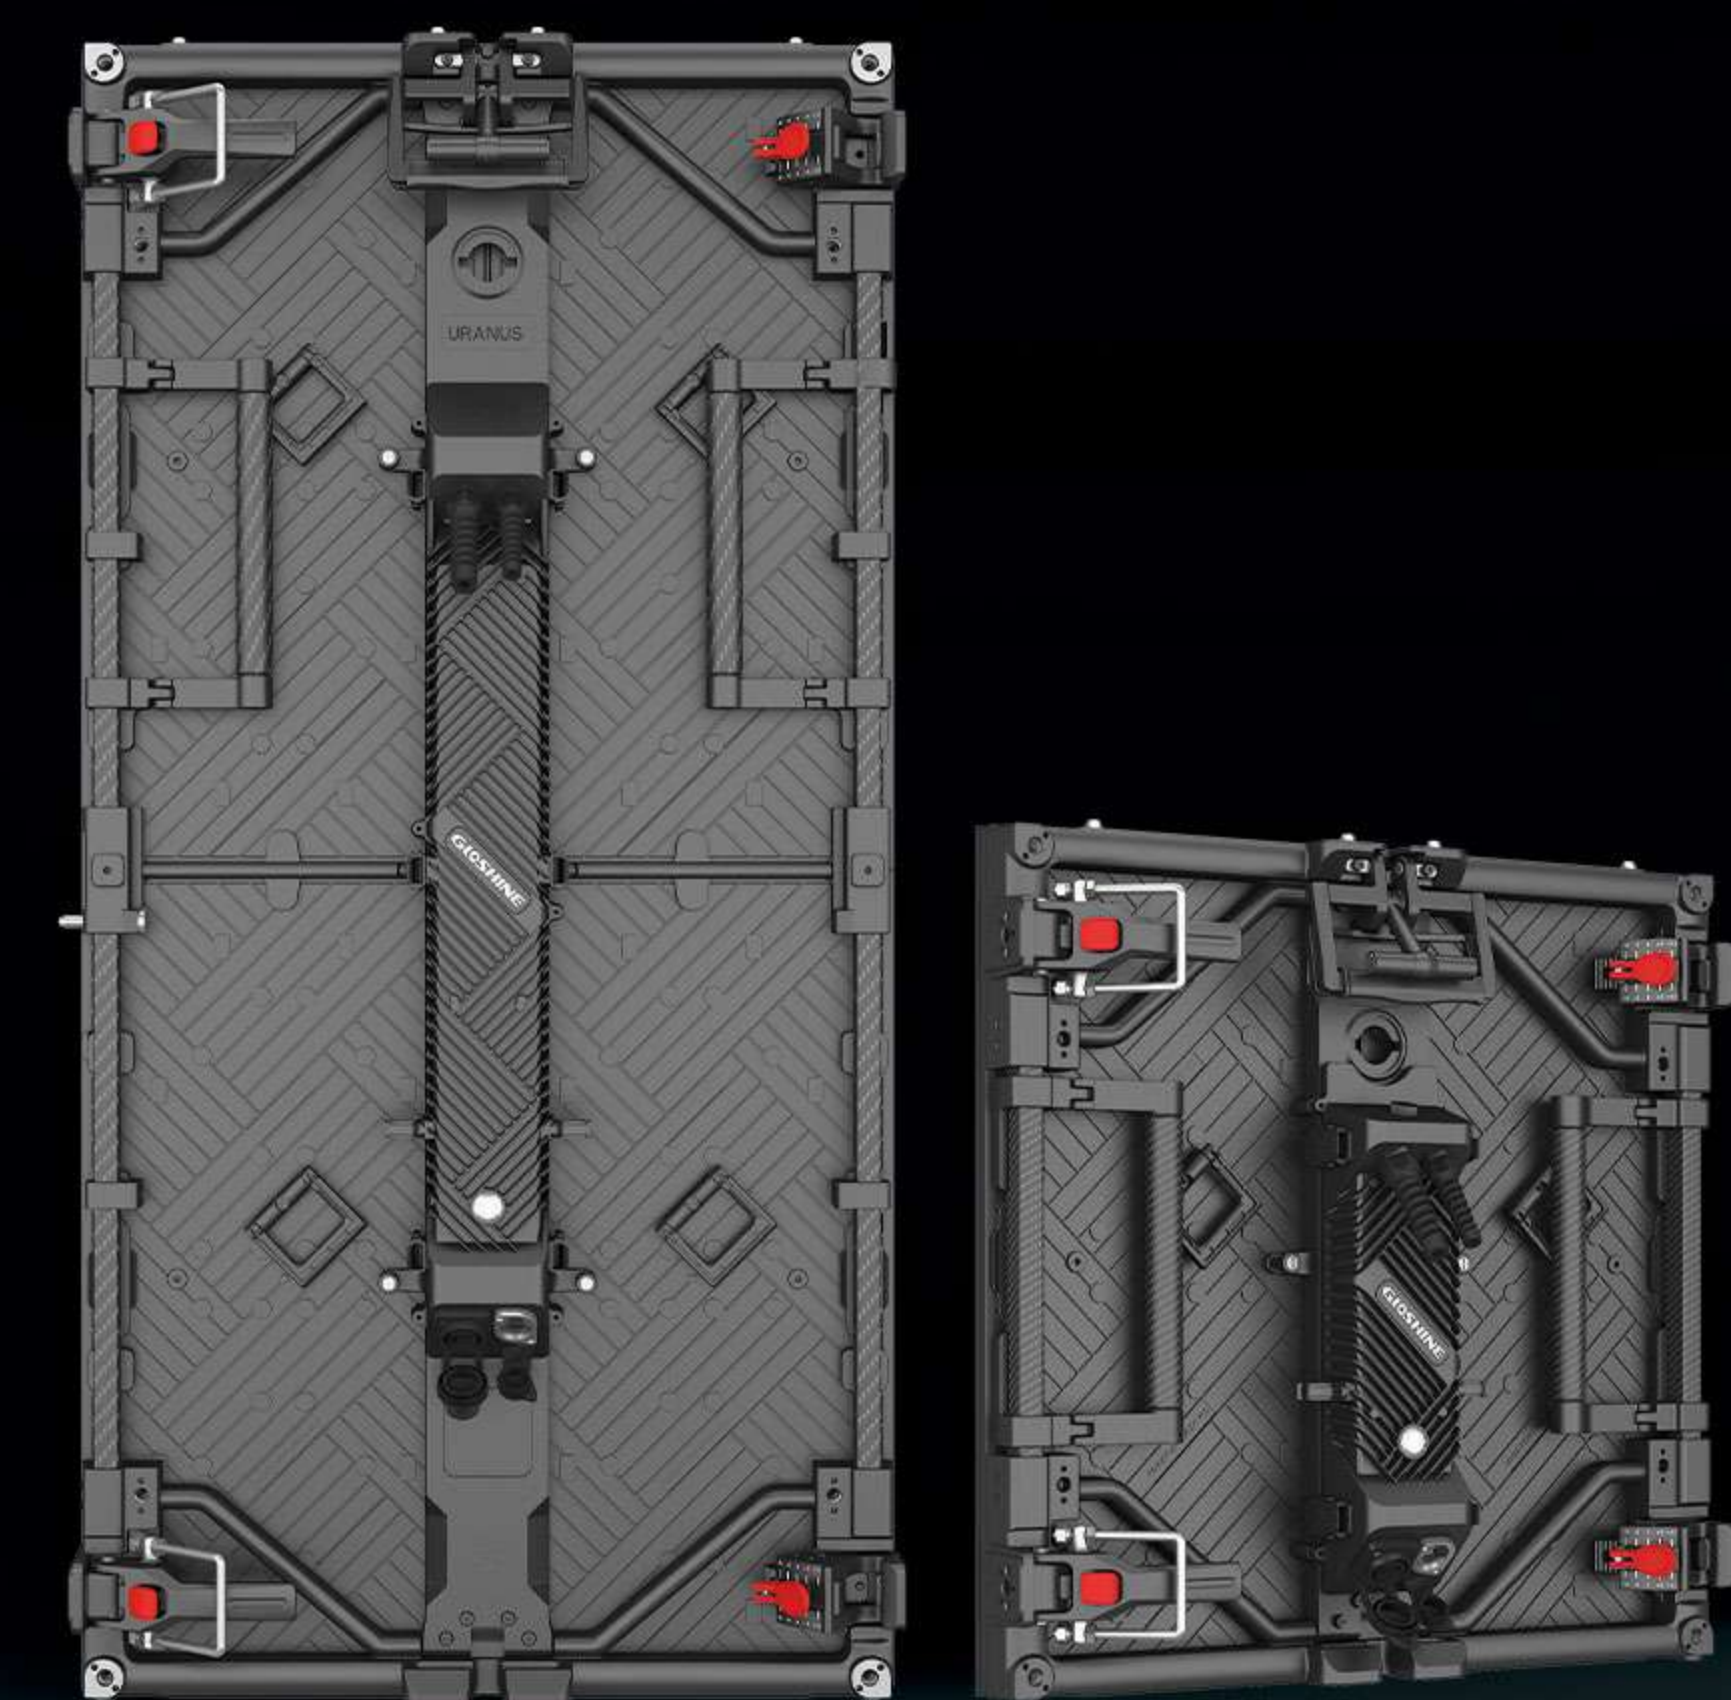


ULTRA LIGHT

- A perfect combination of carbon fiber and die-casting aluminum, saving installation time, shipping and labor costs.

CREATIVE SHAPES

- Wave shape
- Curved + flat shape.

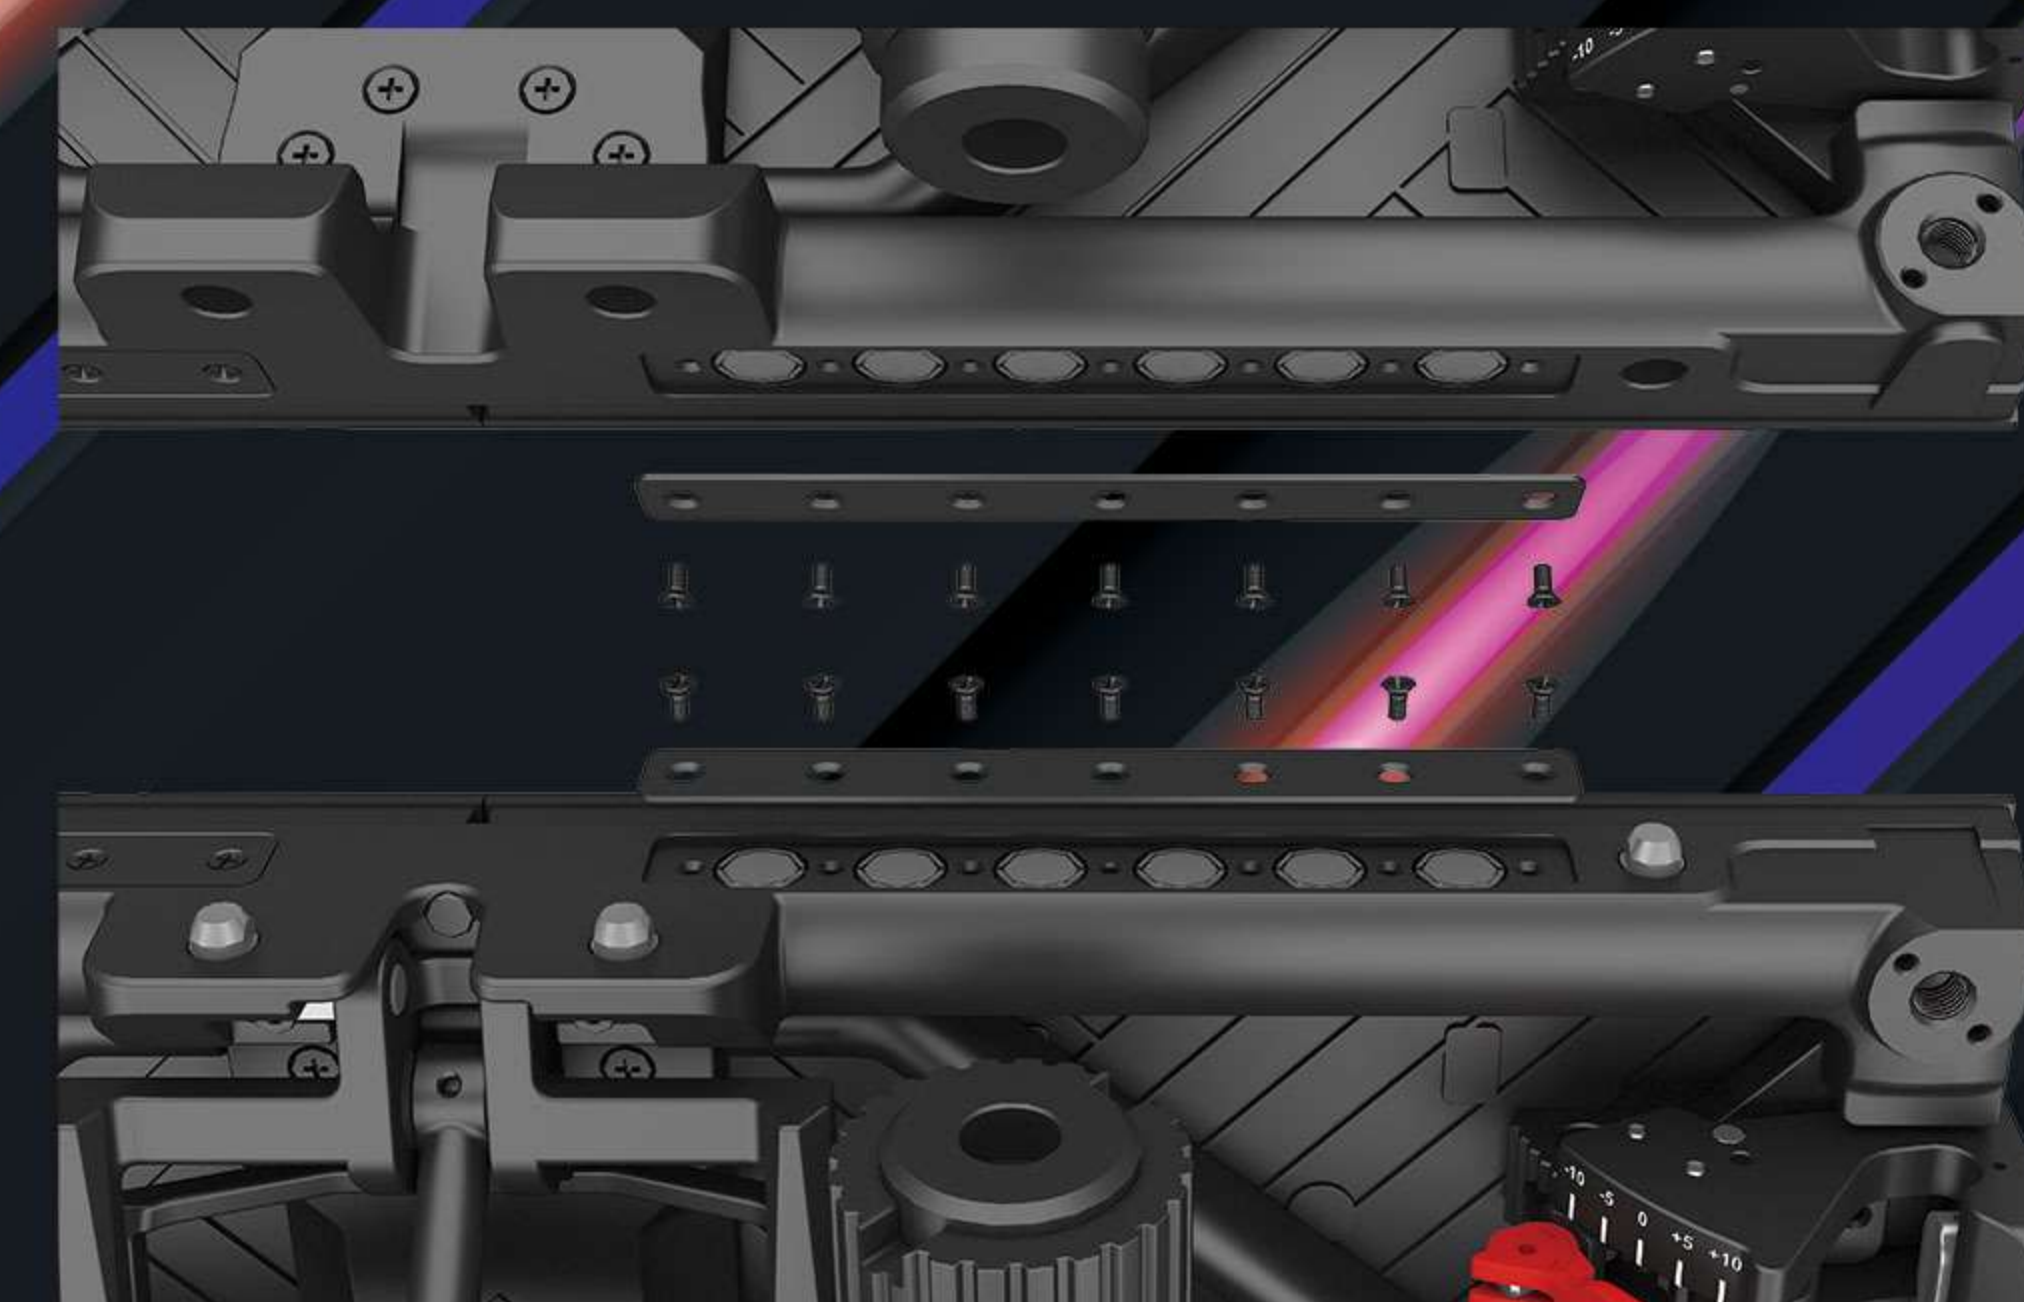

MAGNETIC CABINET DESIGN

- Bulit-in Magnets on the Cabinet, one-person job.

HANGING INSTALLATION

- Maximum hanging Height:20m(With wind-bracing frame) 10m(normal).



SUPERIOR VISUAL PERFORMANCE

- Stands out with black LEDs, high contrast ratio, and vivid colors.