


PARAMETERS

Model No.	LE-B2.9(indoor)	LE-B2.9(outdoor)	LE-B3.9(outdoor)	LE-B4.8(outdoor)
Pixel Pitch	2.97mm	2.97mm	3.91mm	4.81mm
LED Type	SMD2020	SMD1415	SMD1921	SMD1921
Pixel Density	112896 pixel/m²	112896 pixel/m²	65536 pixel/m²	43264 pixel/m²
Panel Resolution	168*336 pixel	168*336 pixel	128*256 pixel	104*208 pixel
	168*168 pixel	168*168 pixel	128*128 pixel	104*104 pixel
Scan Rate	1/21	1/21	1/16or1/8	1/13or1/7
Brightness	800-1200nits	GBW:3000-4000nits GBB:2000-2500nits HBB:3000-3500nits	GBW:3500-4500 GBB:2300-2500 HBB:3500-4000	GBW:3500-4500 GBB:2500-3000 HBB:3500-4000
Color Temperature	6500-9500K			
Panel Dimension	Small Box: 500mm*500mm*87mm Large Box: 500mm*1000mm*87mm			
Panel Weight	Small Box: 9.5kg±10% Large Box: 14.7kg±10%			
Cabinet Material	Die-casting Cabinet			
Max Power Consumption	≤650w/m²			
Ave Power Consumption	≤325w/m²			
Viewing Angle	H:160°V:140°			
Refresh Rate	3840Hz/7680Hz			
Gray Scale	14-16bit			
Working Voltage	AC100-240V~50/60Hz or AC200-240V~50/60Hz			
IP Rating	IP31	Front IP65,Rear IP54		
Curve	-10°/-7.5°/-5°/-2.5°/0°/2.5°/5°/7.5°/10°			
Max Stacking/Hanging	10m			
Operating Temp/Humidity	-20℃~+45℃; 10%~60%RH	-20℃~+45℃; 10%~90%RH		
Storage Temp/Humidity	-40℃~+60℃; 10%~60%RH			

Abbreviation Annotation:
GBB: General Brightness for Black LEDs HBB: High Brightness for Black LEDs GBW: General Brightness for White LEDs HBW: High Brightness for White LEDs

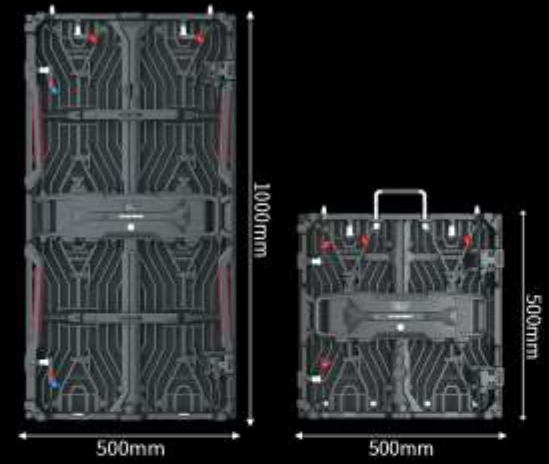

*Product informations are for reference only.
*Products are subject to upgrades or changes without prior notice.
*The final interpretation right of products is reserved by Gloshine.

SHENZHEN GLOSHINE TECHNOLOGY CO., LTD.
No. 20 Dingshanhe Road, Pingdi Town, Longgang District, Shenzhen, China
GLOSHINE USA INC: 3111 E Miraloma Ave,Anaheim,CA,92806
Tel: +86 0755 2995 1691 Fax: +86 0755 8441 9301
Web: <http://www.gloshine.com> E-mail: international@gloshine.cn



LE Series won
iF DESIGN AWARD 2020,
fully upgraded in 2023

Legend Series

Colorful Vision Show Now

OUTDOOR HD LED SCREEN



Touring Frame (Optional)

The optional touring frame for LE cabinet making stacking installation easy & convenient. Friendly for the big festival event hanging up for wind resistant.



Multiple Installation

Concave -10° -7.5° -5° -2.5° 0° 2.5° 5° 7.5° 10°

Curving Options



Integrated Design

Power supply, receiving card, back cover all-in-one design for quick & convenient maintenance



Dual Latches (top&side)

Dual stainless steel top latches and side latches for each panel. Efficient installation



With Touring Frame



High Stability



Transport Dolly (Optional)

Transport Dolly Package Available
2x6 panels/ Dolly
Improve installation efficiency



Anti-collision Design (Optional)

Cabinet corners are reserved for protector installation. The optional protectors can protect corners lamp beads from damage due to collisions.



Full Waterproof



Wide Viewing Angle



Easy Repair