

Parameters

Model No.	DN-B1.9(Indoor)	DN-B1.9(Indoor)	DN-B/DN PLUS-B2.6(Indoor)	DN-B/DN PLUS-B2.9(Indoor)	DN-B/DN PLUS-B3.9(Indoor)
Pixel Pitch	1.95mm	1.95mm	2.60mm	2.97mm	3.91mm
LED Type	IMD 2-in-1	SMD1515	SMD1515	SMD2020	SMD2020
Packaging Technology	SMD	GOB/HOB	SMD/HOB	SMD	SMD
Pixel Density	262144 pixel/m²	262144 pixel/m²	147456 pixel/m²	112896 pixel/m²	65536 pixel/m²
Panel Dimension	DN-B: 500mm*500mm*76mm		DN PLUS-B: 500mm*1000mm*76mm	DN-B: 500mm*500mm*76mm	
Panel Resolution	DN-B256*256 pixel	DN-B 256*256 pixel	DN PLUS-B 192*384 pixel DN-B 192*192 pixel	DN PLUS-B 168*336 pixel DN-B 168*168 pixel	DN PLUS-B 128*256 pixel DN-B 128*128 pixel
Scan Rate	1/32 or 1/16	1/32 or 1/16	1/24 or 1/16 or 1/8	1/21	1/16
Brightness	800-1000nits	800-1000nits	800-1000nits	800-1000nits	800-1000nits
Refresh Rate	3840Hz/7680Hz				
Color Temperature	6500-9500K				
Panel Weight	DN-B: 7.2kg±10% DN PLUS-B: 12.2kg±10% GOB: DN-B: 7.5kg±10% DN PLUS-B: 12.7kg±10% Dual Backup: 8kg±10% HOB: DN-B: 7.7KG, DN PLUS-B: 13.2KG				
Panel Material	Die-Casting Aluminum				
IP Rating	Ip30				
Curve	Curved Cabinet/45°Beveled Cabinet (±10°curved lock): -10°/-7.5°/-5°/-2.5°/0°/2.5°/5°/7.5°/10°90°lock/connecting plate: 90°				

Model No.	DN-B/DN PLUS-B2.6(Outdoor)		DN-B/DN PLUS-B2.9(Outdoor)		DN-B/DN PLUS-B3.9(Outdoor)	
Pixel Pitch	2.60mm		2.97mm		3.91mm	
LED Type	SMD1415		SMD1415		SMD1921	
Packaging Technology	SMD		SMD		SMD	
Pixel Density	147456 pixel/m²		112896 pixel/m²		65536 pixel/m²	
Panel Dimension	DN PLUS-B 500mm*1000mm*76mm DN-B 500mm*500mm*76mm		DN PLUS-B 500mm*1000mm*76mm DN-B 500mm*500mm*76mm		DN PLUS-B 500mm*1000mm*76mm DN-B 500mm*500mm*76mm	
Panel Resolution	DN PLUS-B 192*384 pixelDN-B 192*192 pixel		DN PLUS-B 168*336 pixelDN-B 168*168 pixel		DN PLUS-B 128*256 pixelDN-B 128*128 pixel	
Scan Rate	1/24		1/21		1/8 or 1/16	
Brightness	GBB: 2500-3000nits HBB: 3000-3500nits GBW: 3000-3500nits HBW: 3500-4000nits		GBB: 3000-3500nits HBB: 3500-4000nits GBW: 3500-4000nits HBW: 4000-4500nits		1/8 GBB: 2800-3000nits HBB: 4000-4500nits GBW: 4000-4500nits HBW: 5000-5500nits 1/16 GBB: 2300-2500nits HBB: 3500-3800nits GBW: 3500-4000nits HBW: 4500-5000nits	
Refresh Rate	3840Hz/7680Hz					
Color Temperature	6500-9500K					
Panel Weight	DN-B: 7.2kg±10% DN PLUS-B: 12.5kg±10%					
Panel Material	Die-Casting Aluminum					
IP Rating	Front IP65, RearIP54					
Curve	Curved Cabinet/45°Beveled Cabinet (±10°curved lock): -10°/-7.5°/-5°/-2.5°/0°/2.5°/5°/7.5°/10°90°lock/connecting plate: 90°					

*Product parameters are for reference only. *Products are subject to upgrades or changes without prior notice. *The final interpretation right of products is reserved by Glos hine. Abbreviation Annotation: GBB: General Brightness for Black LEDs HBB: High Brightness for Black LEDs GBW: General Brightness for White LEDs HBW: High Brightness for White LEDs

Cases



Asian Winter Games



Andy Lau, "...is The Day"



Buyi Mao, "the Inner Venture Tour"

SHENZHEN GLOSHINE TECHNOLOGY CO.,LTD.

Tel: (86)0755-29951691
Fax: (86)0755-84419301
E-mail: international@gloshine.cn
Add: No. 20 Dingshanhe Road, Pingdi Town, Longgang District, Shenzhen, China



Glos hine LED



Glos hineLED



gloshinedisplay



XR Studio



Curving Capability



Wide Viewing Angle



Easy Maintenance



4K

Ever-Changing Shapes Infinity Creative

Dawn Series


Structure

Thin & Light Weight

DN-B 500mm x 500mm
7.2KG (±10%)


DN Plus-B 500mm x 1000mm
12.2 KG (±10%)

DN-B & DN PLUS-B
Thickness 76 mm

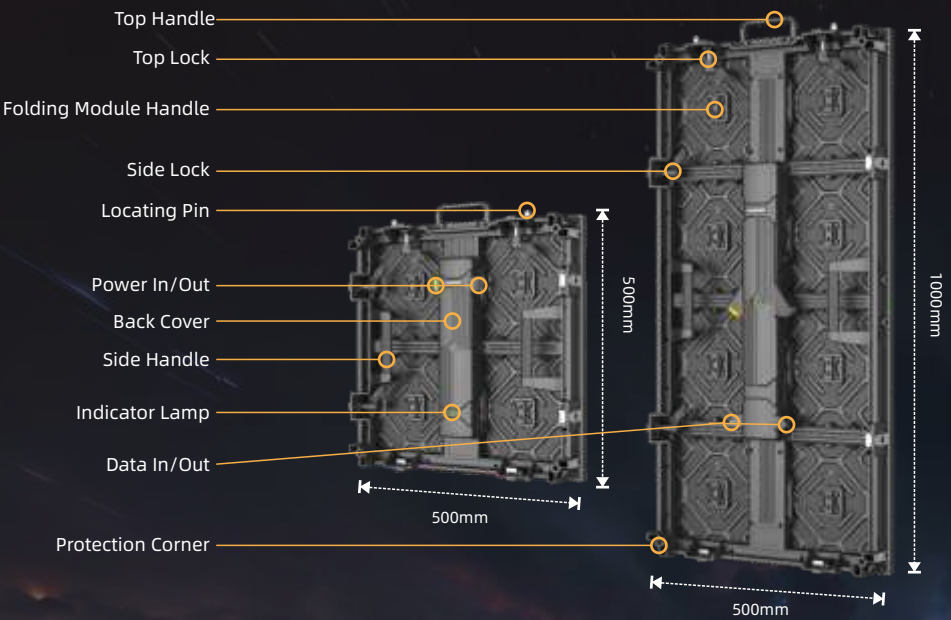

Stable Performance

Stick the high quality standard for excellent display effect, stable performance, and maintain well image quality even during long hour operating.

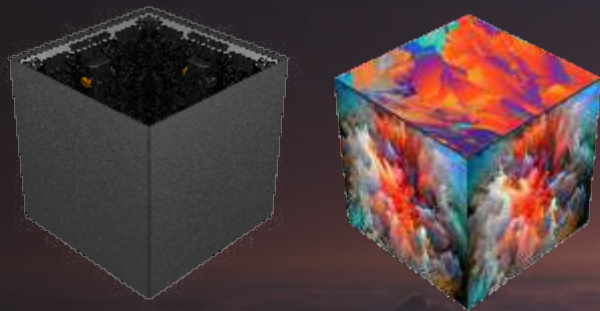

45° Beveled Cabinet

Available for vertical splicing, cubic column, cube shape, etc.




90° right angle splicing



Quick Maintenance

Magnetic Module
More Efficient Installation
Quick Front/Rear
Maintenance

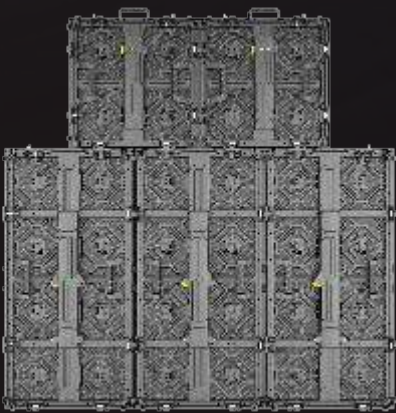

Combination of big and small cabinets

Option for straight, curved, 45° beveled cabinet, support mix set-up Supports splicing with flexible cabinets like CF PRO, CL Series



Stacking & Hanging

Maximum Height 10 Meters

